

WATER RECIRCULATING SYSTEM

When the “WRS” Water Recirculating System is connected to the SACKETT Battery Washer, the standard washer push-button will start and stop the system.



GENERAL SPECIFICATIONS:

- 100 gallon Water Holding Tank
- 20 gpm, 40 psi Centrifugal Pressure Pump
- 20 gallon Return Sump
- Automatic, Plastic Corrosion Resistant Sump Pump
- (2) Partical filters
- (1) Active Carbon filter
- PH indicator
- Single Phase, 120 volt, 20 amp branch
- Ground Fault Circuit Interrupter (manual wash system)
- All Stainless Steel Framwork available.

PORTABLE “WRS”

- Auto Feeding of Neutralizer
- 4-way Entry Fork Pockets
- Rear Caster & Lift Jack Handle
- Handheld Scrub Brush with Hose

Option:

- 5-ft. long Fork Extension




SACKETT
Lifting, Stacking, Storing
INNOVATING SINCE 1897

1033 Bryn Mawr Ave. • Bensenville • IL • 60106 • USA
630.766.5500 • fax 630.766.5631 • www.sackettsystems.com

WATER RECIRCULATING SYSTEM

Portable Wash Rack

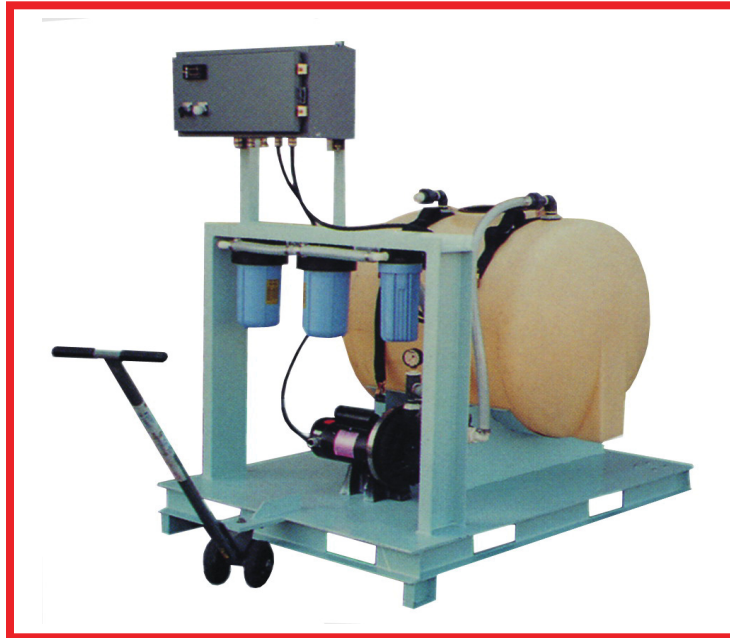

Wash Rack



Model A with WRS



SACKETT
Lifting, Stacking, Storing
INNOVATING SINCE 1897

1033 Bryn Mawr Ave. • Bensenville • IL • 60106 • USA
630.766.5500 • fax 630.766.5631 • www.sackettsystems.com